



# Raspberry Pi PoE HAT

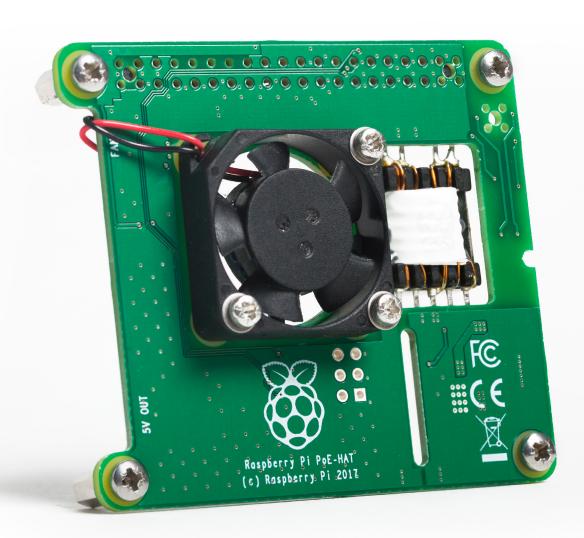


## Overview

The Raspberry Pi PoE HAT is an add-on board for the Raspberry Pi 3 Model B+ (and later boards). It is used to power the Raspberry Pi via an Ethernet cable, provided that power-sourcing equipment is installed on the Ethernet network.

The HAT also includes a fan that will cool the processor on the main Raspberry Pi board.

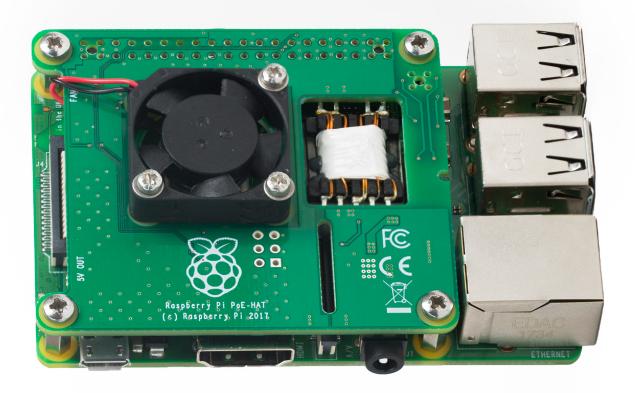



## **Specifications**

Standard: IEEE 802.3af-2003 PoE

Input voltage: 37–57 V DC, Class 2 device

Output power: 5 V DC/2.5 A

Cooling: 25mm × 25mm brushless fan delivering 2.2 CFM for

processor cooling

Features: Fully isolated switched-mode power supply

Fan control

**Compliance:** For a full list of local and regional product approvals,

please visit www.raspberrypi.org/products/poe-hat


**Production lifetime:** The Raspberry Pi PoE HAT will remain in production

until at least January 2023





### **Physical specifications**

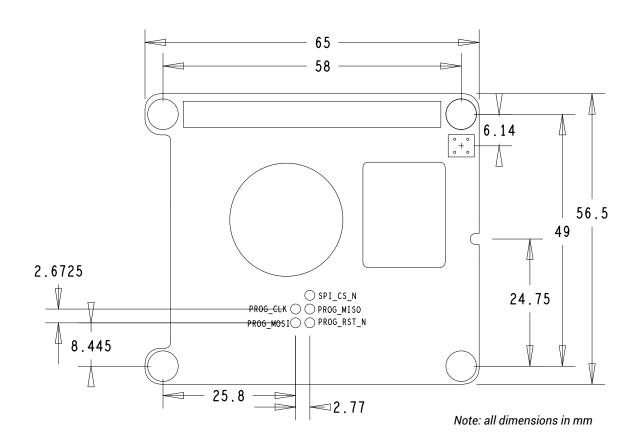

#### Warnings

- This product shall only be connected to a Raspberry Pi 3 Model B+ or later.
- Any external power-sourcing equipment/power injector used to enable a Ethernet network shall comply with relevant regulations and standards applicable in the country of intended use.
- This product should be operated in a well ventilated environment and, if used inside a case, the case should not be covered.
- The connection of incompatible devices to the GPIO connection may affect compliance and result in damage to the unit and invalidate the warranty.
- All peripherals used with this product should comply with relevant standards for the country of use and be marked accordingly to ensure that safety and performance requirements are met. These articles include but are not limited to keyboards, monitors and mice when used in conjunction with the Raspberry Pi.
- Where peripherals are connected that do not include the cable or connector, the cable or connector must offer adequate insulation and operation in order that the relevant performance and safety requirements are met.

#### **Safety instructions**

To avoid malfunction or damage to this product please observe the following:

- Do not expose to water or moisture, or place on a conductive surface whilst in operation.
- Do not expose it to heat from any source. The Raspberry Pi 3 Model B+ and PoE HAT are designed for reliable operation at normal ambient room temperatures.
- Take care whilst handling to avoid mechanical or electrical damage to the printed circuit board and connectors.
- Avoid handling the printed circuit board whilst it is powered and only handle by the edges to minimise the risk of electrostatic discharge damage.



